

# Enviroboards

## Thatch Flexi



Thatch Flexi is manufactured in the UK to the specifications as recommended by Building Control. This product provides one hour fire barrier (B.S. 476: Part 3 2004) Classification EXT.S.AA. Fixed between the thatch and roof construction. In the event of a thatch fire, the thatch is sacrificial and untreated. The Thatch Flexi is a lightweight glass fibre fabric coated both sides with a polyurethane polymer containing micronised aluminium.

### Specifications:


1.27m x 50m  
Covers approx 61sq metre  
50 / 75mm overlap  
Weight 490g/m<sup>2</sup>

### Application:

Thatch Flexi is laid horizontally across the rafters, similar to roofing felt with a 50mm/75mm overlap. Thatch Flexi can be either stapled or nailed to rafters. Then counter batten over the rafters with 25mm x 50mm to allow for airflow. Finally fix first batten 5" from arris rail followed by 12 inch centres thereafter.

### Benefits:

- 1 hour fire barrier
- Easy application
- Water Resistant
- Strong and durable
- Breathable
- Standards and Approval (B.S.476 Part 3 2004)
- Flexible

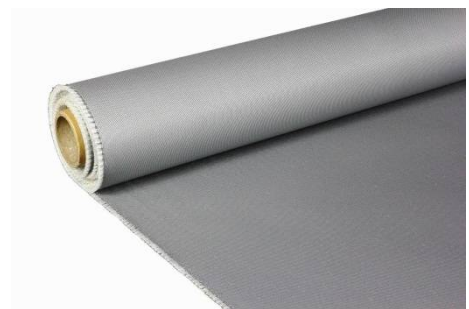

**1.27 x 50m Rolls**  
**£339.00 plus VAT and Delivery**

[www.enviroboards.co.uk](http://www.enviroboards.co.uk)  
VAT Registration No: 101 1279 73

Tel :08455 208880

[info@enviroboards.co.uk](mailto:info@enviroboards.co.uk)  
Company Registration No: 7365331